

marathon<sup>®</sup>  
Motors



# GLOBETROTTER<sup>®</sup> MOTORS

*REGAL*<sup>®</sup>



# BUILT TO GO THE DISTANCE

**Globetrotter®**

## TOTALLY ENCLOSED MOTORS

Customers choose Globetrotter motors for general purpose industrial applications. Why? Globetrotter motors, 1.5 HP through 200 HP, provide the much sought after durability and dependability.

The redesigned totally enclosed cast iron construction now includes:

- IP55 protection
- Division 2/ Zone 2, Class I (gases), Groups A, B, C, D
- Dual frame mounting holes
- F1 to F2 mounting capability


These additional features make this motor ready for the toughest environments and more versatile than ever.

Globetrotter motors are designed to meet or exceed the customer's expectations in the most demanding applications.

## SEE OUR ACCESSORY KITS AND MODIFICATION SECTIONS IN OUR PRODUCT CATALOG FOR ADDITIONAL OPTIONS:

- C-face
- Cast iron conduit boxes
- Cast iron fan guards
- BCP™ bearing current protection\*

\*Bearing current protection may not be installed on motors used in a division 2 location.

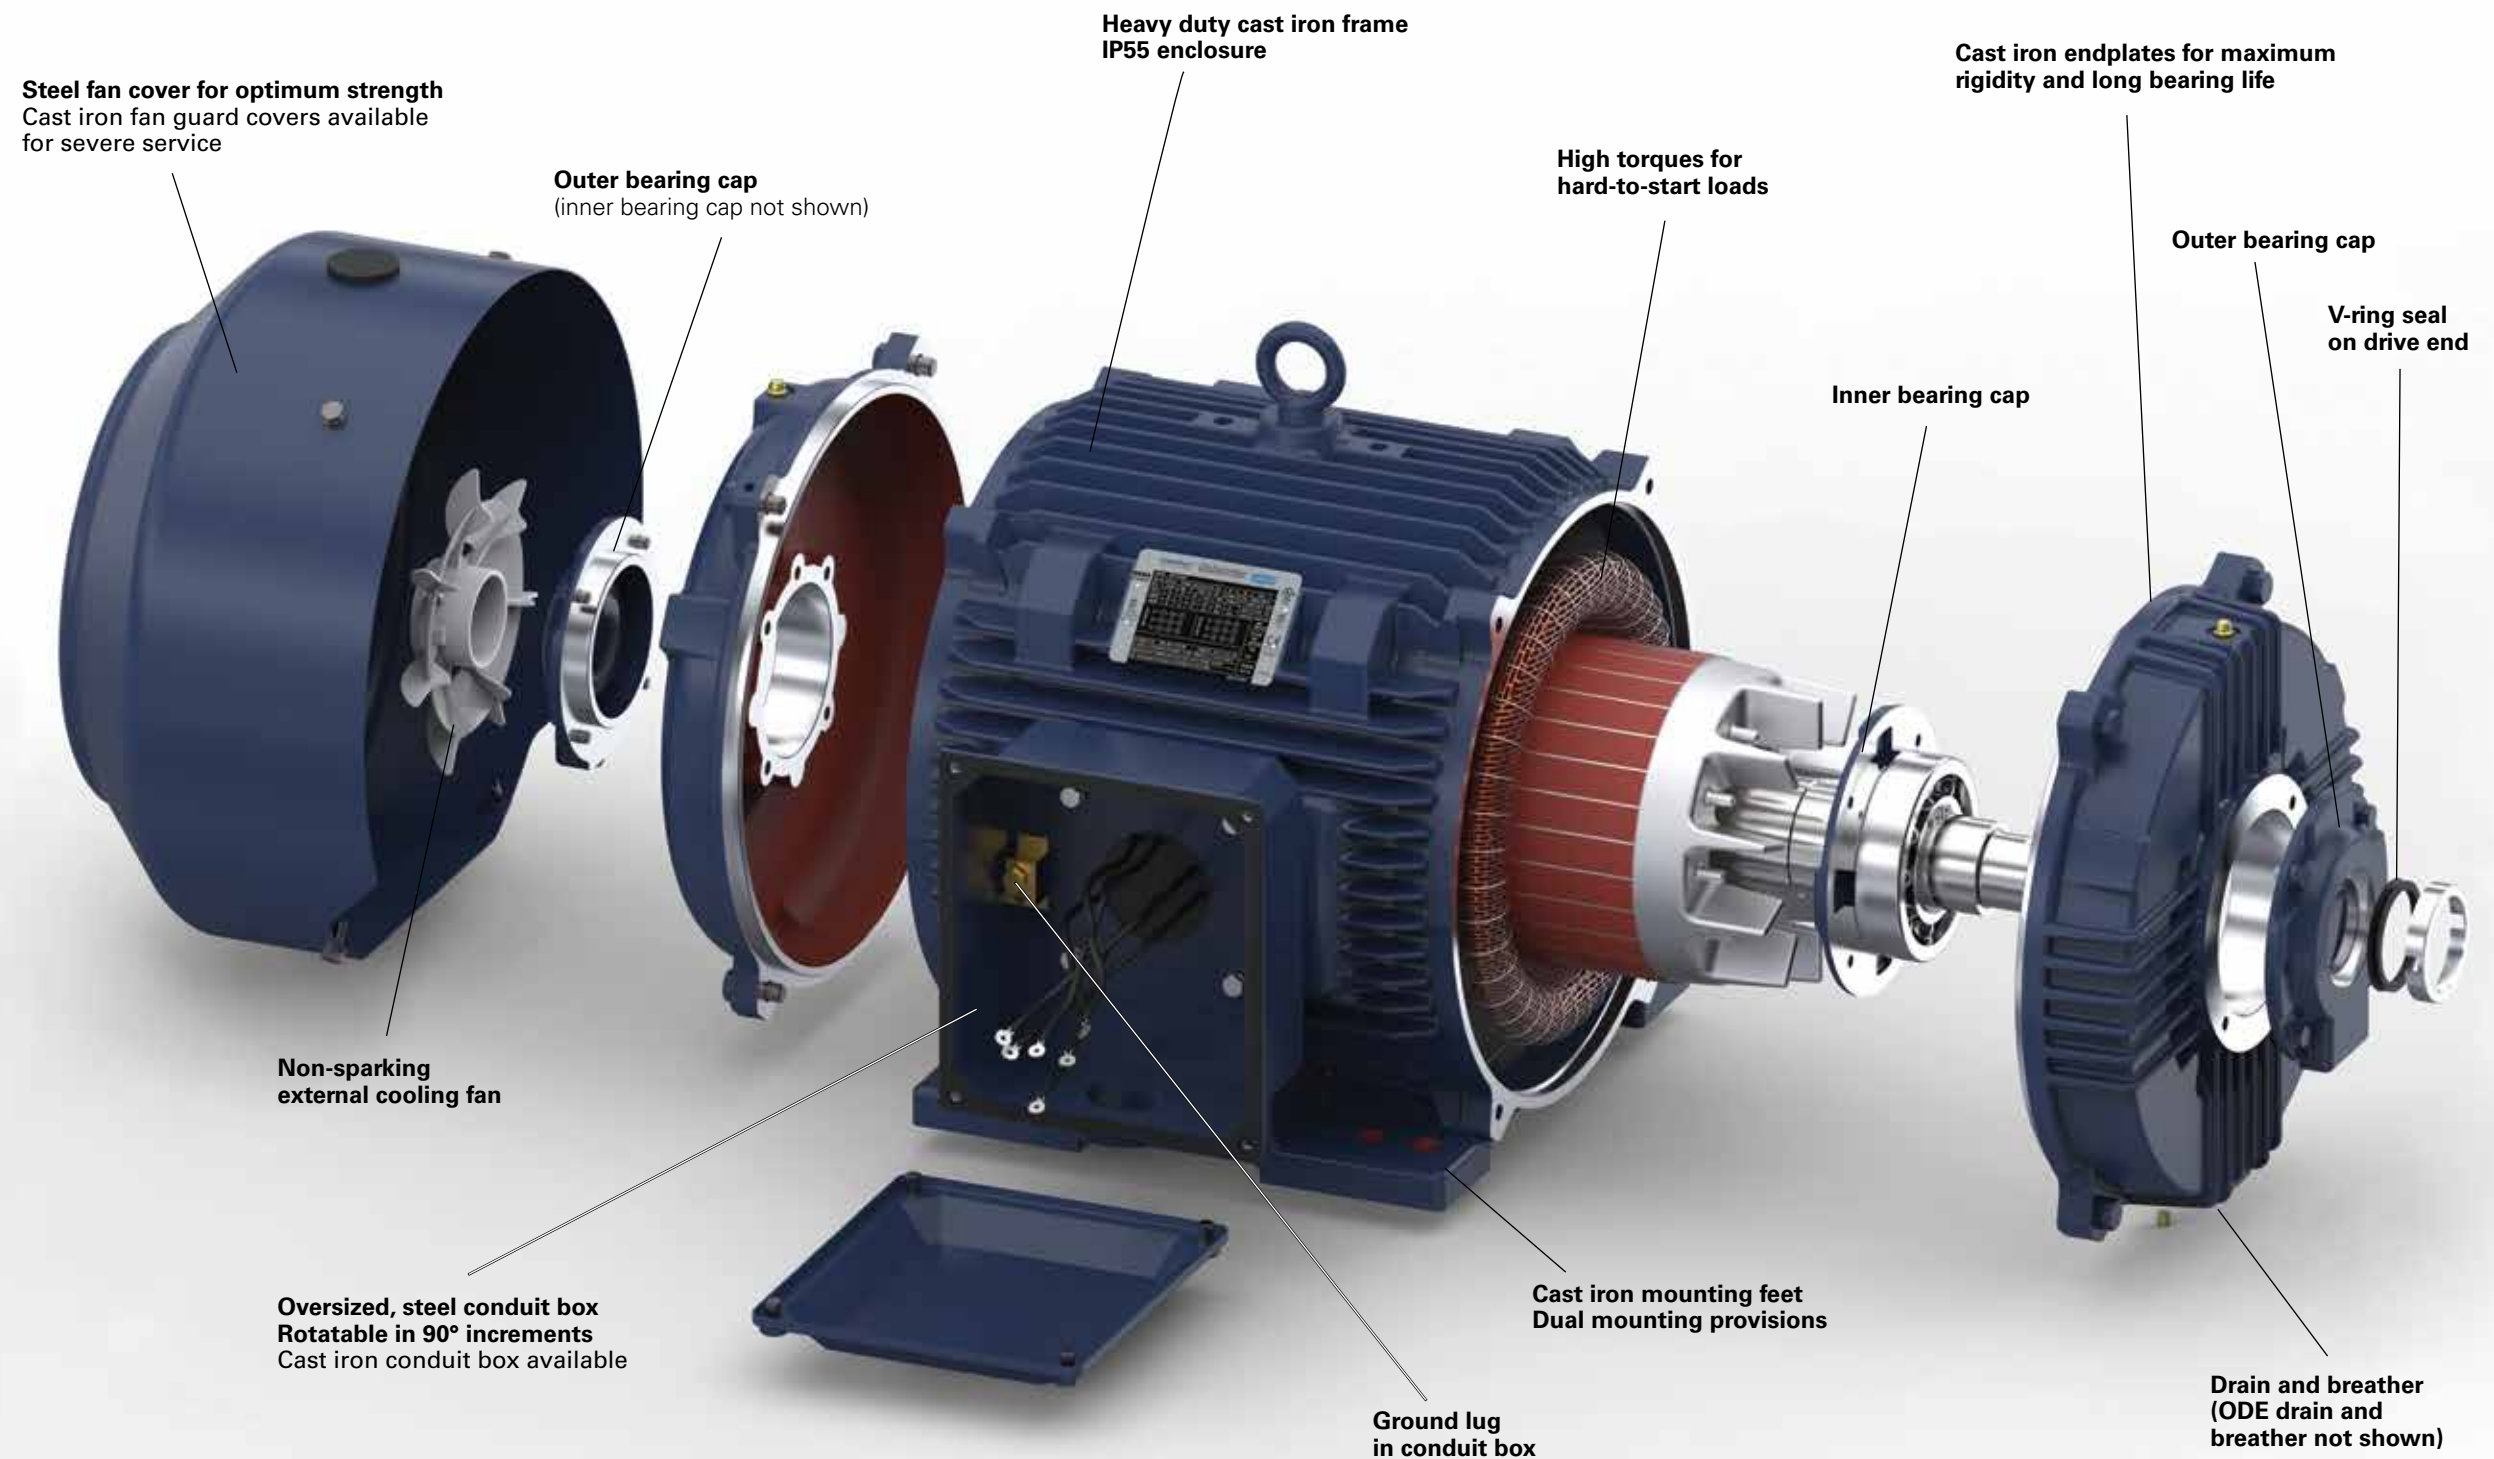



# FOR TOUGH APPLICATIONS



## LOBETROTTER® GENERAL PURPOSE DRIP PROOF

- 182-365 steel frame; 404-449 cast iron frame
- 1.5 - 200 HP
- 2, 4, 6 pole
- 200V, 230/460V, 460V on 125 HP and up, 575V
- Drip proof enclosure
- Steel conduit box
- 1.15 service factor on sinewave
- Class F, Class B rise insulation
- Bearing caps 284-449
- NEMA Premium® efficiencies
- Inverter duty 10:1
- F1/F2 compatible
- Dual frame mounting
- UL recognized, CSA certified, CE mark



## LOBETROTTER GENERAL PURPOSE DRIP PROOF C-FACE

- 182-365 steel frame, 404 cast iron frame
- 1.5 - 100 HP
- 2, 4 pole
- 230/460V, 575V (only through 50 HP)
- Drip proof enclosure
- Steel conduit box
- 1.15 service factor on sinewave
- Class F, Class B rise insulation
- Ball bearings, mechanically locked on shaft end
- NEMA Premium efficiencies
- Inverter duty 10:1
- F1/F2 compatible
- Dual frame mounting
- UL recognized, CSA certified, CE mark



## LOBETROTTER CLOSE COUPLED PUMP DRIP PROOF

- 182-326 steel frame
- 1.5 - 100 HP
- 2, 4, 6 pole
- 200V, 230/460V, 575V
- NEMA® JM and JP shaft dimensions
- JM and JP frames have rigid base
- JMV and JPV frames for vertical mount without base
- Drip proof enclosure
- Steel conduit box
- 1.15 service factor on sinewave
- Ball bearings, mechanically locked on shaft end
- Class F, Class B rise insulation
- Meets or exceeds USA mandated efficiencies
- Inverter duty 10:1
- F1/F2 compatible
- Dual frame mounting
- UL recognized, CSA certified, CE mark



## LOBETROTTER® GENERAL PURPOSE TEFC

- Rolled steel frame 182-256
- Cast iron frame 182-449
- 1.5 - 200 HP
- 2, 4, 6 pole
- 200V, 230/460V, 460V on 125 HP and up, 575V
- TEFC enclosure
- IP43 protection on rolled steel frames
- IP55 protection on cast iron frames
- Division 2, Zone 2 Class I (gases) Groups A,B,C,D
- Meets temperature code T2B
- Steel conduit box & fan guard
- 1.15 service factor on sinewave
- Class F, Class B rise insulation
- Bearing lock 182-286
- Bearing caps 324 and up
- NEMA Premium® efficiencies
- Inverter duty 10:1
- F1/F2 compatible
- Dual frame mounting
- UL recognized, CSA certified, CE mark



## LOBETROTTER GENERAL PURPOSE TEFC C-FACE

- Rolled steel frame 182-256
- Cast iron frame 182-405
- 1.5 - 100 HP, 2, 4, 6 pole, C-face footed
- 1.5 - 10 HP, 2, 4, 6 pole, C-face footless
- 200V, 230/460V, 575V (only C-face footed)
- TEFC enclosure
- IP43 protection on rolled steel frames
- IP55 protection on cast iron frames
- Cast iron construction
- Division 2, Zone 2 Class I (gases) Groups A,B,C,D
- Meets temperature code T2B
- Steel conduit box & fan guard
- 1.15 service factor on sinewave
- Class F, Class B rise insulation
- Bearing lock 182-286
- Bearing caps 324 and up
- NEMA Premium efficiencies
- Inverter duty 10:1
- F1/F2 compatible
- Dual frame mounting
- UL recognized, CSA certified, CE mark



## LOBETROTTER CLOSE COUPLED PUMP TEFC

- Rolled steel frame 182-215
- Cast iron frame 254-326
- 1.5 - 50 HP
- 2, 4, 6 pole
- 200V, 230/460V, 575V
- NEMA® JM and JP shaft dimensions
- JM and JP frames have rigid base
- JMV and JPV frames for vertical mount without base
- TEFC enclosure
- IP43 protection on rolled steel frames
- IP55 protection on cast iron frames
- Division 2, Zone 2 Class I (gases) Groups A,B,C,D
- Meets temperature code T2B
- Steel conduit box & fan guard
- 1.15 service factor on sinewave
- Class F, Class B rise insulation
- Bearing lock 182-286, bearing caps 324-326
- Meets or exceeds USA mandated efficiencies
- Inverter duty 10:1
- F1/F2 compatible
- Dual frame mounting
- UL recognized, CSA certified, CE mark

## HVAC



## CONVEYORS



## COMMERCIAL PUMPING



## COOLING TOWERS



## INDUSTRIAL CONVEYORS



## INDUSTRIAL PUMPING





## GENERAL INFORMATION


### WEBSITE AND E-COMMERCE

Information can be accessed instantly, any time of the day on our website and e-commerce site at [www.regalbeloit.com/Brands/Marathon-Motors](http://www.regalbeloit.com/Brands/Marathon-Motors). Our comprehensive product data is available in a convenient bundled file called our data sheet, or by individual certification and performance files. Download CAD files for products, view products in a 360° rotatable view or access necessary dimensional drawings all in one place.



DATA SHEET ± OUTLINE CONNECTION CERTIFICATION PERFORMANCE 2D CAD ± 3D CAD ± WARRANTY MANUAL

### NAMEPLATE INFORMATION

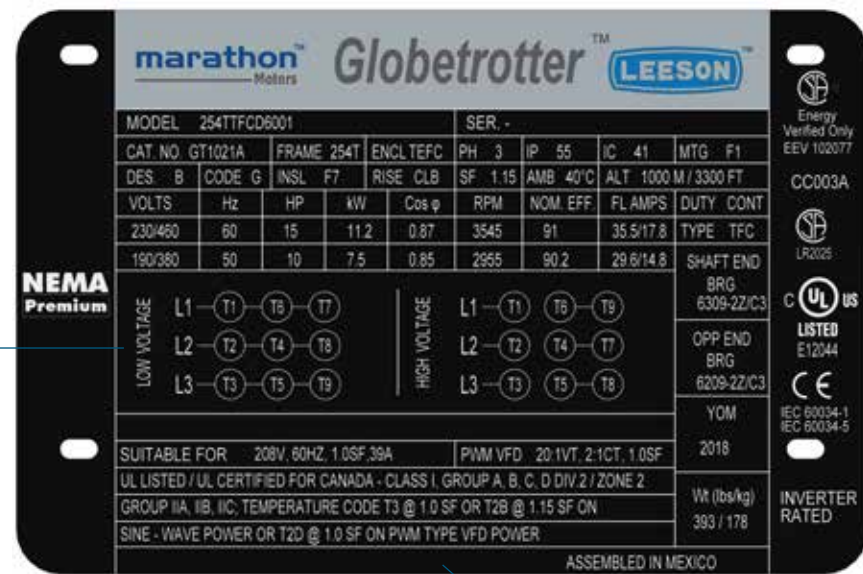

The nameplate is the key to selecting the proper replacement motor. The model number is the key to finding the correct replacement parts.

Agency symbols

Connection details for low or high voltage

Inverter information and UL listed Division 2

- MODEL** - The ID number
- CAT.NO.** - Catalog number
- FRAME** - Size and mounting
- ENCL** - Enclosure
- PH** - Electrical phase
- IP** - Ingress protection
- IC** - Inherent cooling
- MTG** - Conduit box location - F1 or F2
- DES** - Code by NEMA®
- CODE** - NEMA locked-rotor KVA
- INSL** - Insulation class
- RISE** - Full load operating temperature
- SF** - Percentage of rated HP the motor can safely operate at
- AMB** - The allowable surrounding air temperature
- ALT** - The allowable altitude

- VOLTS** - Voltage rating of the motor at the operating frequency
- HZ** - Input frequency of the power supply
- HP** - Rated horsepower the motor will produce
- kW** - Rated output in watts
- Cos φ** - Cosine is the ratio of actual power to the apparent power
- RPM** - Full load speed at rated frequency
- NOM.EFF.** - Average efficiency
- FL AMPS** - The rated load current expressed in amps at the nameplate HP, voltage and frequency
- DUTY** - Time rating under load
- SHAFT END BRG** - Drive end bearing size
- OPP END BRG** - Opposite drive bearing size
- YOM** - Year of Manufacture
- Wt (lbs/kg)** - Motor weight in pounds and kilograms

## COMPETITIVE ANALYSIS - TEFC - FOOTED

Features	Marathon® Globetrotter® Motors (Old)	Marathon® Globetrotter® Motors (New)	Baldor® Super-E® Motors ECP-Severe Duty	TECO® MAX-E1® Motors	WEG® W22® Motors Severe Duty
<b>NEMA Premium®</b>	Yes	Yes	Yes	Yes	Yes
<b>Inverter Capable</b>	Yes	Yes	Yes	Yes	Yes
<b>SGR</b>	Pre drilled for SGR	Mod available	Mod available	Mod available	Optional
<b>Frame Material</b>	Cast iron 182-449	Rolled steel up to 256, cast iron 182-449	Steel up to 210, cast iron 250 and up	Cast iron	Cast iron
<b>F2 Convertible</b>	Yes	Yes and dual drilled for larger frames	Yes	Yes with dual drilled for larger frames	Yes
<b>IP Code</b>	IP43	IP43 rolled steel IP55 cast iron	IP55	IP54	IP55
<b>Hazardous loc.</b>	None	Div 2, class I	Div 2, class I	Div 2, class I	Div 2, class I
<b>Drain</b>	Drain hole in bracket up to 210, and in frame for 250 and up	Brass drain & brass breather on each bracket, radially	On brackets, axial	Drain hole on each bracket, radially	On bracket, rubber plug, radially
<b>Bearing Cap</b>	Internal & external on both ends	Internal & external on both ends (324 frame and up)	Internal on both ends	Internal & external on 280 and up	Internal & external on 250 and up
<b>Greasing</b>	Grease fittings	Grease fittings	Pipe plug	Automatic grease discharge fittings	Grease relief fitting on 250 & up
<b>Fan Guard/Conduit Box Material</b>	Steel with cast iron kits available	Steel with cast iron kits available	Cast iron	Cast iron	Fan guard: steel up to 210, cast iron 250 & up Conduit box: cast iron
<b>Name Plate Material</b>	Aluminum	Stainless steel	Stainless steel	Stainless steel	Stainless steel

## COMPETITIVE ANALYSIS - ODP - FOOTED

Features	Marathon Globetrotter (Old)	Marathon Globetrotter (New)	Baldor Super-E Motors	TECO Motors ASHH & ASGH	WEG Motors
<b>NEMA Premium</b>	Yes	Yes	Yes	Yes	Yes
<b>Inverter Capable</b>	Yes	Yes	Yes	Yes	Yes
<b>SGR</b>	Pre-drilled for SGR	Mod available	Mod available	Some models may have SGR	Optional
<b>Frame Material</b>	Rolled steel up to 286, cast iron for 324 & up	Rolled steel extended up to 365 frame, cast iron 400 frame & up	Rolled steel up to 400	Rolled steel up to 280 cast iron 140 to 440	Rolled steel up to 250 cast iron 250 & up
<b>F2 Convertible</b>	Yes	Yes and dual drilled for larger frames	Yes	No for rolled steel up to 280. Yes for all cast iron frames	Rolled steel, F1 only cast iron, yes
<b>IP Code</b>	IP21	IP21	-	IP22	Rolled steel frames, IP21 Cast iron frames (256-5810), IP23
<b>Bearing Cap</b>	Internal & external on both ends	Internal & external on both ends (284 frame and up)	No	Internal & external on both ends 280TS & up	Optional, standard for flanged motors
<b>End Brackets Material</b>	Cast iron	Cast iron	Cast iron on cast iron frames	Cast iron on cast iron frames	Aluminum on rolled steel frames, cast iron on cast iron frames
<b>Conduit Box Material</b>	Steel with cast iron kits available	Steel with cast iron kits available	Aluminum up to 360, cast iron for 400 & up	Rolled steel	Aluminum on rolled steel frames, cast iron on cast iron frames
<b>Name Plate Material</b>	Aluminum	Stainless steel	Aluminum	Stainless steel	Stainless on cast iron frames

**marathon**<sup>®</sup>  
—Motors



**Regal Beloit America, Inc.**  
100 E. Randolph Street, PO Box 8003  
Wausau, WI 54402-8003 USA  
PH: 715-675-3311

[www.regalbeloit.com](http://www.regalbeloit.com)

**Regal Beloit America, Inc.**  
1051 Cheyenne Avenue  
Grafton, WI 53024 USA  
PH: 262-377-8810

**APPLICATION CONSIDERATIONS**

The proper selection and application of products and components, including the related area of product safety, is the responsibility of the customer. Operating and performance requirements and potential associated issues will vary appreciably depending upon the use and application of such products and components. The scope of the technical and application information included in this publication is necessarily limited. Unusual operating environments and conditions, lubrication requirements, loading supports, and other factors can materially affect the application and operating results of the products and components and the customer should carefully review its requirements. Any technical advice or review furnished by Regal Beloit America, Inc. and/or its affiliates ("Regal") with respect to the use of products and components is given in good faith and without charge, and Regal assumes no obligation or liability for the advice given, or results obtained, all such advice and review being given and accepted at customer's risk.

For a copy of our Standard Terms and Conditions of Sale, please visit <https://www.regalbeloit.com/Terms-and-Conditions-of-Sale>. These terms and conditions of sale, disclaimers and limitations of liability apply to any person who may buy, acquire or use a Regal product referred to herein, including any person who buys from a licensed distributor of these branded products.

The following trademarks are not under the control of Regal Beloit Corporation: Baldor and Super-E are believed to be trademarks or trade names of ABB ASEA Brown Boveri, TECO and Max-E1 are believed to be trademarks or trade names of TECO Electric & Machinery, WEG and W22 are believed to be trademarks or trade names of WEG S. S. sociedades anônimas, NEMA and NEMA Premium are trademarks of National Electrical Manufacturers Association.

Regal, BCP, Globetrotter, LEESON and Marathon are trademarks of Regal Beloit Corporation or one of its affiliated companies.

© 2019 Regal Beloit Corporation, All Rights Reserved. MCB19039E • Form# MB0087E

